


CAD DRAWING - NO MANUAL REVISIONS

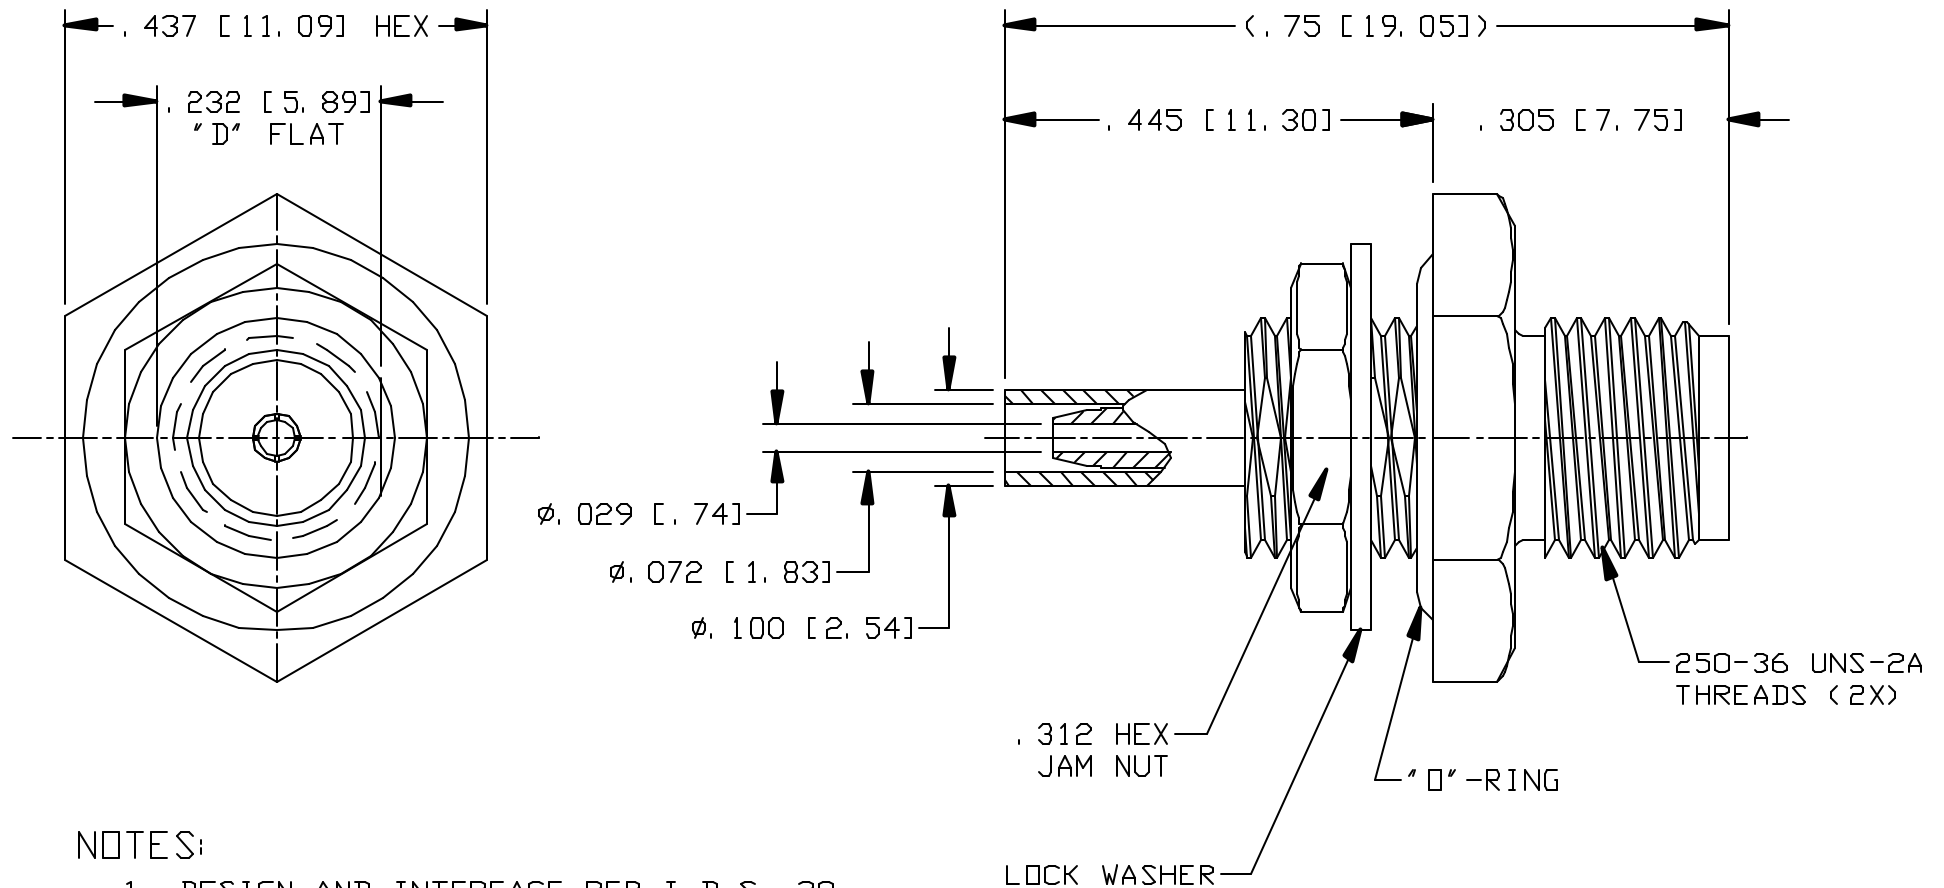

NOTES:

1. DESIGN AND INTERFACE PER I. D. S. -20.
2. BULLET, JAM NUT, LOCK WASHER, "O"-RING & FERRULE ARE SHIPPED LOOSE.
3. RATED TO IP67.
4. MOUNTING HOLE PER DS-16A, FIGURE 3.
5. ACCOMMODATES HIROSE 068 (1.13mm) OR EQUIVALENT CABLES.
6. CRIMP USING .081 HEX DIE (DANIELS Y1547P).

				PALCO CONNECTOR 22 GREAT HILL RD., NAUGATUCK, CT 06770 UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY TOLERANCES ON: DECIMALS: XX ±.01 .XXX ±.005 ANGLES ±1/2° 32' DIMENSIONS IN INCHES OR (METRIC) DO NOT SCALE PRINTS	DRAWN JEM	CHECKED JEM	ENGINEER JEM	APPROVED JEM	FSCM 58167
						DESCRIPTION SMA WATERPROOF FRONT MOUNT BULKHEAD JACK			
					DATE 11/15/12	DRAWING NO. 20-1917-0298		PLATING OPT. G, P	
REV.	DESCRIPTION	DATE	APPR.		CATALOG ITEM				