


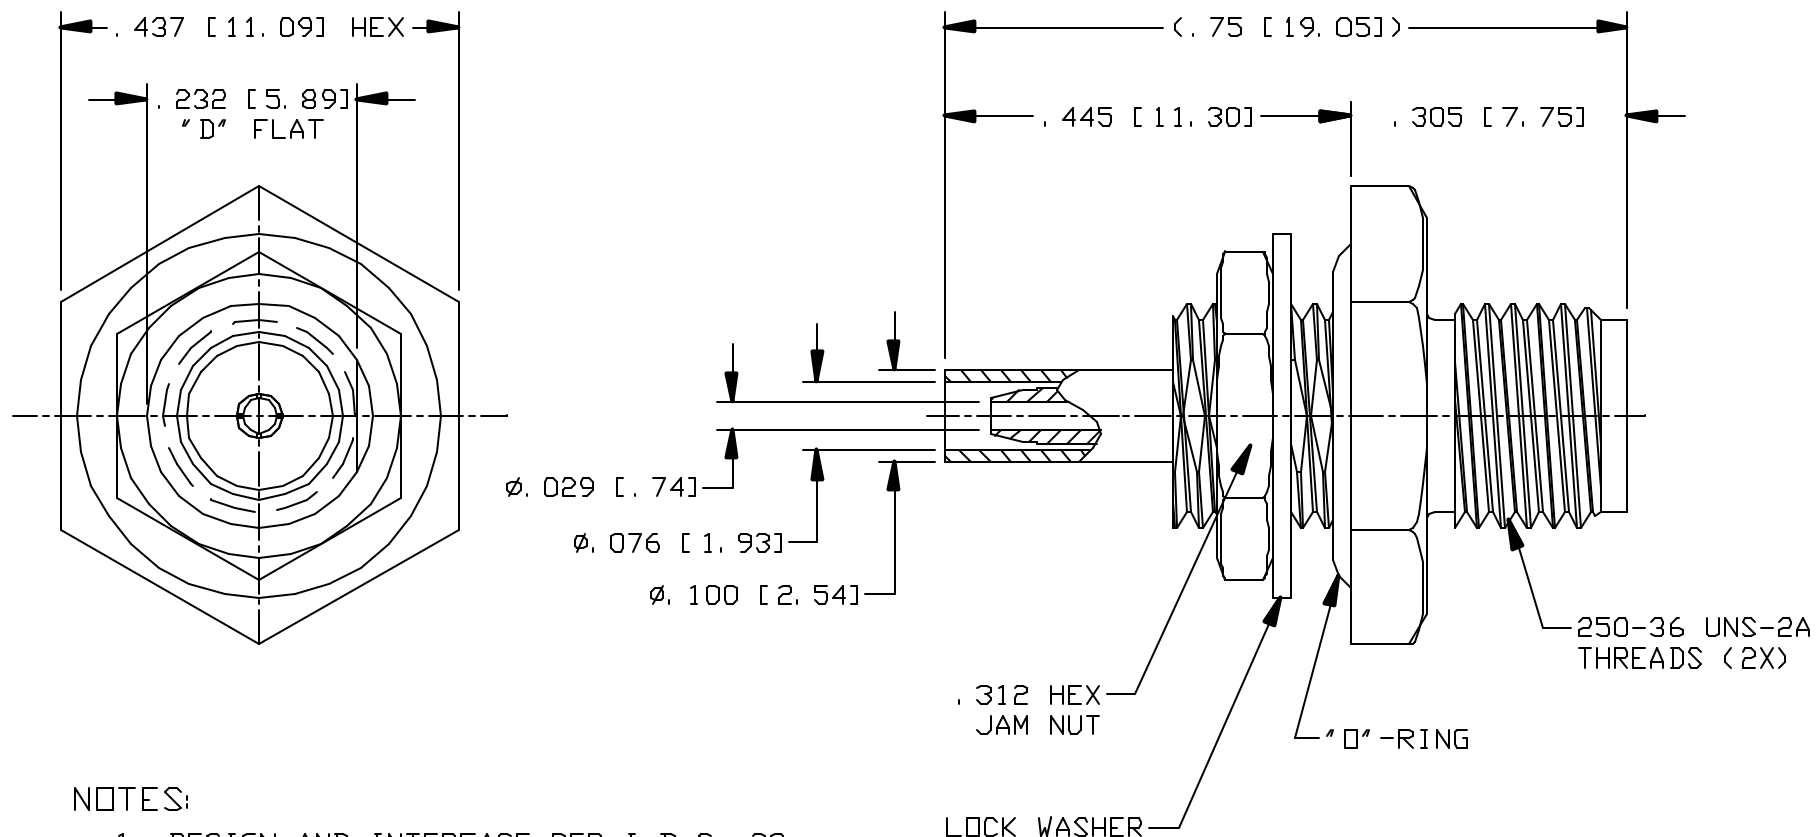

NOTES:

1. DESIGN AND INTERFACE PER I. D. S. -20.
2. BULLET, JAM NUT, LOCK WASHER, "O"-RING & FERRULE ARE SHIPPED LOOSE.
3. RATED TO IP67.
4. MOUNTING HOLE PER DS-16A, FIGURE 3.
5. ACCOMMODATES HIROSE 066 (1.32mm) OR EQUIVALENT CABLES.
6. CRIMP USING .081 HEX DIE (DANIELS Y1547P).

|      |               |          |       |                                                                                                                                                                                                                                                                                                                         |              |                                                      |                             |                      |               |
|------|---------------|----------|-------|-------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------------|--------------|------------------------------------------------------|-----------------------------|----------------------|---------------|
|      |               |          |       | <div><div><div>PALCO CONNECTOR</div><div>22 GREAT HILL RD., NAUGATUCK, CT 06770</div><div>UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY</div><div>TOLERANCES ON: DECIMALS: XX ± .01 .XXX ± .005 ANGLES ±1/2° 32√</div><div>DIMENSIONS IN INCHES OR &lt;METRIC&gt; DO NOT SCALE PRINTS</div></div></div> | DRAWN<br>JEM | CHECKED<br>JEM                                       | ENGINEER<br>JEM             | APPROVED<br>JEM      | FSCM<br>58167 |
|      |               |          |       |                                                                                                                                                                                                                                                                                                                         |              | DESCRIPTION SMA WATERPROOF FRONT MOUNT BULKHEAD JACK |                             |                      |               |
| A    | PER ECN 11572 | 02/07/13 | JEM   |                                                                                                                                                                                                                                                                                                                         |              | DATE<br>11/15/12                                     | DRAWING NO.<br>20-1917-0398 | PLATING OPT.<br>G, P |               |
| REV. | DESCRIPTION   | DATE     | APPR. |                                                                                                                                                                                                                                                                                                                         | CATALOG ITEM |                                                      |                             |                      |               |