


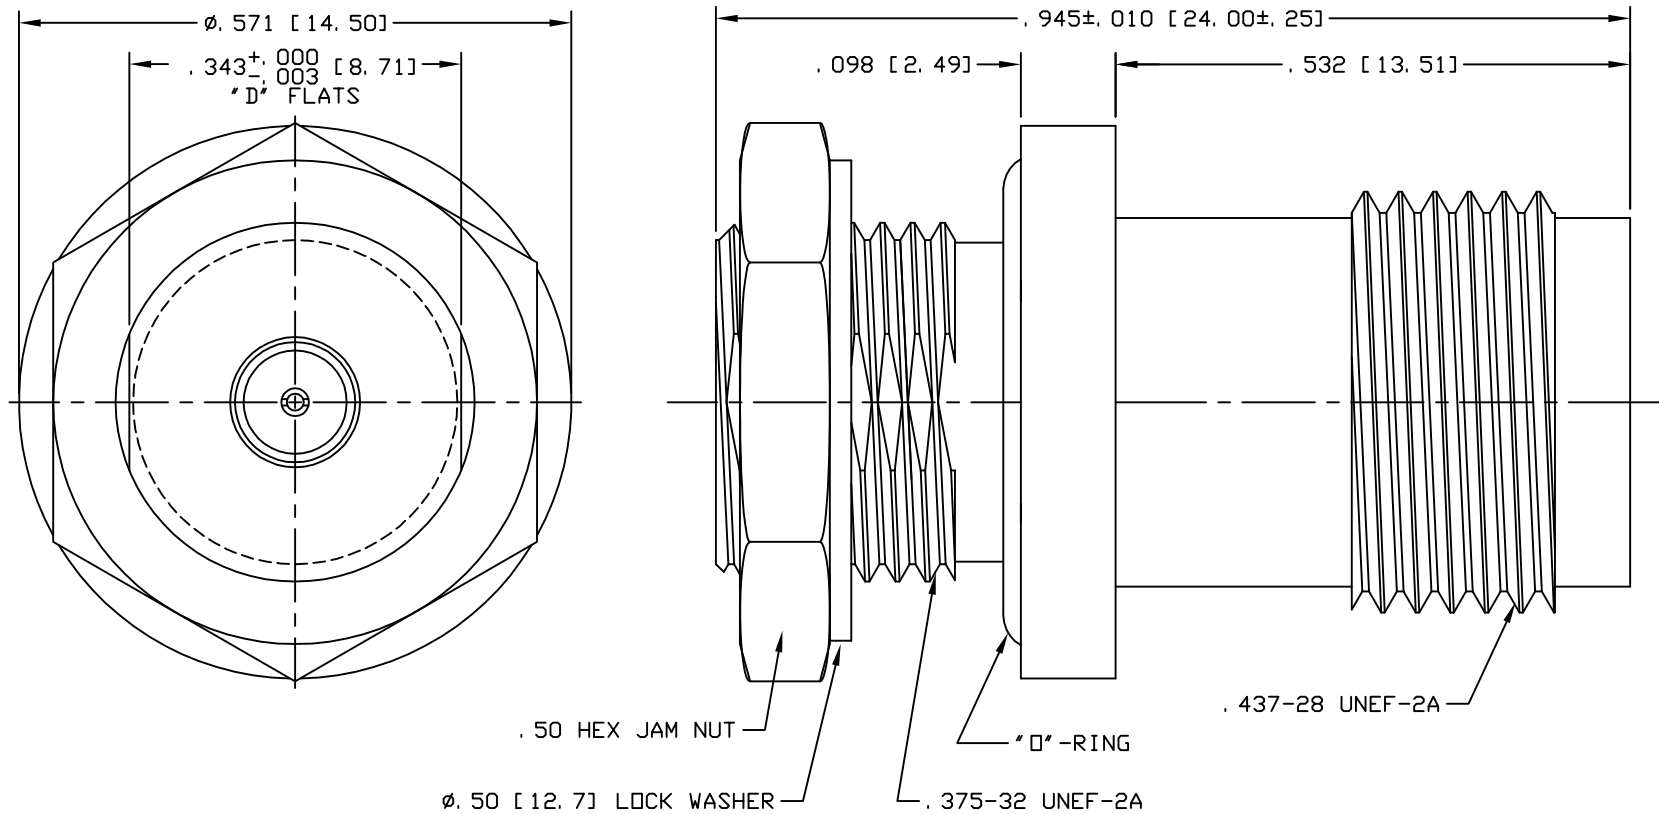

- NOTES:
- 1. DESIGN AND INTERFACES PER IDS-33 (EXCEPT MAT'L. - SST AND PLATING - P00)-42.
 - 2. "D"-RING, LOCK WASHER AND JAM NUT SHIPPED LOOSE.
 - 3. MUST MEET A 15 PSI, 30 SECOND LEAK TEST.
 - 4. FOR MOUNTING HOLE SEE DS16B, FIGURE 5.
 - 5. DESIGN FOR .125 MAX. BULKHEAD.
 - 6. ELECTRICAL REQUIREMENTS:
 - 6.1 FREQUENCY RANGE: DC TO 6 GHz.
 - 6.2 INSERTION LOSS: -.42 dB MAX.
 - 6.3 VSWR: 1.39: 1 MAX.

PARTS	MATERIALS	FINISH
BODY, NUT	SST 303, QQ-S-763 SST 304, QQ-S-764	PASSIVATION OVER LIGHT SAND BLAST
CONTACT	BE. CU. ASTM-B-196	.000050 GOLD OVER .00005 NICKEL
LOCK WASHER	BRONZE ASTM-B-591	.00020 NICKEL OVER .00005 COPPER
INNER RING	BRASS, ASTM-B-16	.00020 NICKEL OVER .00005 COPPER
INSULATOR	TEFLON, ASTM-D-1710	
"D"-RING	SILICONE RUBBER PER ZZ-R-765	

				PALCO CONNECTOR 22 GREAT HILL RD., NAUGATUCK, CT 06770 UNLESS OTHERWISE SPECIFIED, PALCO WORKMANSHIP STANDARDS APPLY TOLERANCES ON: DECIMALS: XX ±.01 .XXX ±.005 ANGLES ±1/2° 32√ DIMENSIONS IN INCHES OR (METRIC) DO NOT SCALE PRINTS	DRAWN MS	CHECKED JEM	ENGINEER MS	APPROVED JEM	FSCM 58167
C	PER ECN 12014	10/21/14	JEM			DESCRIPTION MMCX BULKHEAD JACK TO TNC JACK ADAPTOR			
B	PER ECN 11429	08/31/12	JEM						
A	PER ECN 11202	12/21/11	JEM		DATE 11/23/11				
REV.	DESCRIPTION	DATE	APPR.		DRAWING NO. 3342-1169-00		PLATING OPT. P		